



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 :

B68G 9/00, A47C 27/06

A1

(11) International Publication Number:

WO 00/55088

(43) International Publication Date: 21 September 2000 (21.09.00)

(21) International Application Number: PCT/GB00/00917

(22) International Filing Date: 13 March 2000 (13.03.00)

(30) Priority Data:

9905964.4

17 March 1999 (17.03.99)

GB

(71) Applicant (for all designated States except US): SPRING-FORM TECHNOLOGY LIMITED [GB/GB]; Wellington Street, Long Eaton, Nottingham NG10 4HT (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): WHITWORTH, Ian, James [GB/GB]; 154 Crich Lane, Belper, Derbyshire DE56 1EP (GB).

(76) Agent: JONES, Stephen, Anthony; Lewis &amp; Taylor, 49 Stoney Street, Nottingham NG1 1LX (GB).


(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

Vorlage	Ablage	C662
Haupttermin		
Eing.: 19. APR. 2005		
PA. Dr. Peter Riebling		
Bearb.:	Vorgelegt.	

(54) Title: METHOD AND APPARATUS FOR MANUFACTURING INNERSPRING ASSEMBLIES

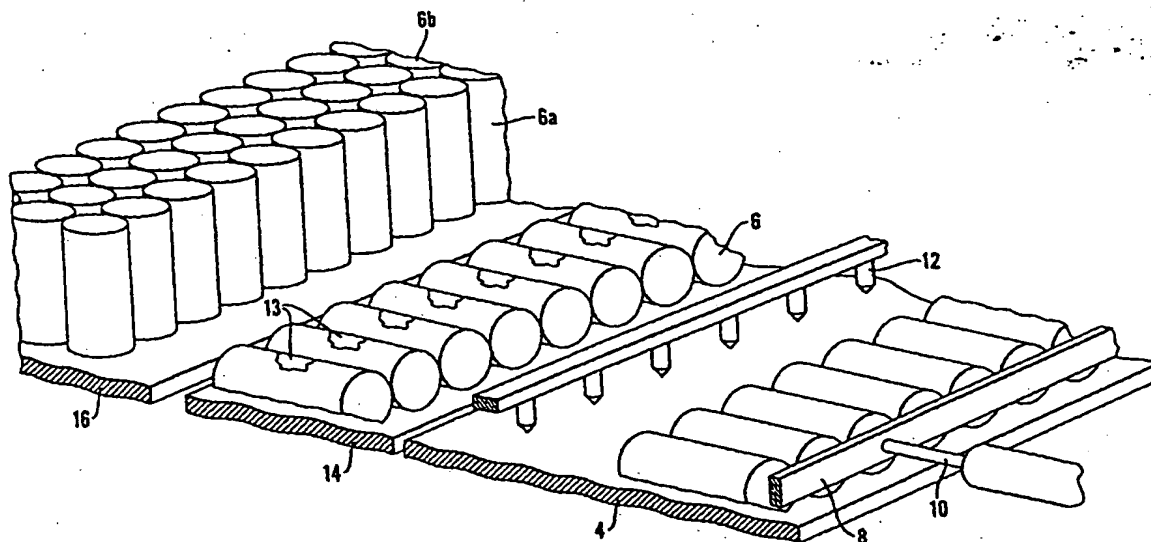

## (57) Abstract

A method for the manufacture of an innerspring assembly, suitable for a mattress, cushion or the like, comprises the steps of a) positioning a first string (6) of pocketed coil springs in juxtaposition with a plurality of adhesive applicators (12) disposed in mutually fixed relation on an axis parallel to a longitudinal axis of said first string (6), b) applying adhesive from said adhesive applicators (12) to said first string (6) of pocketed coil springs, and c) bringing said first string (6) into adhesive contact with a second string (6a) of pocketed coil springs. Apparatus for carrying out the method is also disclosed, as are innerspring assemblies produced by the method.

BEST AVAILABLE COPY

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Title - Method and Apparatus for Manufacturing Innerspring Assemblies

This invention relates to a method and apparatus for manufacturing innerspring assemblies, in particular innerspring assemblies for mattresses or the like, said innerspring assemblies comprising chains of pocketed coil springs arranged side by side and adhered together laterally by adhesive.

It is well known to assemble innerspring assemblies for mattresses and the like from pocketed coil springs. Typically, chains of pocketed springs are manufactured by feeding the springs direct from a spring coiling machine into the space between two plies of a weldable fabric, the two plies then being sealed together to form a pocket which encapsulates the spring. The fabric is then indexed forward, the next spring encapsulated, and so on. In this way, lengthy chains of pocketed springs are built up. Such chains of pocketed springs are referred to herein as "strings" of springs.

An innerspring assembly of appropriate dimensions for a mattress can then be built up by placing appropriate lengths of pocketed spring chain side by side and adhering them together.

Automated methods for forming innerspring assemblies in this way, and apparatus for carrying out such methods, are known. European Patent No 0154076, for example, discloses a method in which an adhesive applicator is passed over a string of pocketed springs, the applicator being actuated briefly as it passes over each spring so as to apply a line of adhesive to the spring, parallel to the lines defining the transverse sides of the pockets, and then contacting the string of springs against another similar string of springs.

European Patent No 0421495 discloses another method in which a string of pocketed springs is passed longitudinally past a fixed adhesive applicator such that adhesive is applied to one side of the string, which is then pressed into contact with a corresponding side of a second string of springs.

In both of the above methods the amount of adhesive applied to the various springs in each string is substantially the same. This can be a disadvantage in that it results in the innerspring assembly having a uniform degree of firmness along its whole length. Sometimes it is desirable for the firmness of the innerspring assembly to vary along its length. For instance, it is known to manufacture a mattress with three zones of firmness, the central region, which carries the greatest part of the weight of a person lying on the mattress, being relatively stiff, whilst the head and foot parts of the mattress are less stiff for greater comfort. A more sophisticated arrangement is a five zone mattress in which the central part is again the stiffest, but the extreme ends are also somewhat stiffer than the intermediate regions. Such arrangements cannot easily be produced using known innerspring assembly apparatus. Another disadvantage of the known systems is that the need to move the string of springs past a fixed adhesive applicator, or to move an applicator over a string of springs, may slow down the manufacturing process.

There have now been devised a method and apparatus for the manufacture of innerspring assemblies, which overcome or substantially mitigate the above-mentioned or other disadvantages of the prior art.

According to a first aspect of the invention, there is provided a method for the manufacture of an innerspring assembly, which method comprises the steps of

- a) positioning a first string of pocketed coil springs in juxtaposition with a plurality of adhesive applicators disposed in mutually fixed relation on an axis parallel to a longitudinal axis of said first string,
- b) applying adhesive from said adhesive applicators to said first string of pocketed coil springs, and
- c) bringing said first string into adhesive contact with a second string of pocketed coil springs.

The method according to the invention is advantageous primarily in that, because a plurality of adhesive applicators are used, the amount and/or distribution of adhesive applied to each

individual pocket may be varied, thereby enabling control of the firmness of regions of the innerspring assembly, and hence of the finished mattress. Also, because the adhesive may be applied simultaneously from the adhesive applicators to all the pockets of the first string (rather than being applied to the pockets sequentially), an increase in operating speed and throughput may be achieved. Also, where the adhesive applicators are actuated simultaneously, the length of time between dispensing of the adhesive and contacting of the first and second may be minimised and is also the same for all parts of the strings, leading to improved and more consistent adhesion.

The invention also provides an innerspring assembly manufactured by the method of the first aspect of the invention.

According to another aspect of the invention, there is provided apparatus for use in the manufacture of an innerspring assembly, which apparatus comprises a plurality of adhesive applicators, means for positioning a first string of pocketed coil springs in juxtaposition with said plurality of adhesive applicators, and means for bringing said first string into adhesive contact with a second string of pocketed coil springs, wherein said plurality of adhesive applicators are disposed in mutually fixed relation on an axis parallel to a longitudinal axis of said first string.

For most applications, adhesive is preferably dispensed from the plurality of adhesive applicators simultaneously or substantially simultaneously.

Preferably, the first string of pocketed coil springs is fed longitudinally to the apparatus of the invention and then displaced transversely into juxtaposition with the adhesive applicators. Most preferably, the adhesive applicators are arranged in a line and are disposed above the path of transverse movement of the first string. Each applicator will generally have a downwardly directed outlet for adhesive (which will normally be in the form of a liquid), normally in the form of a nozzle. For some applications, each applicator may be provided with more than one outlet, eg a number of nozzles arranged in a row transverse or parallel

to the longitudinal axis of the first string, or a single nozzle with more than one orifice arranged to dispense adhesive in different directions.

5 The first string may be manufactured by conventional techniques, eg by inserting the springs in compressed condition between the plies of a folded sheet of ultrasonically weldable fabric and forming closed compartments for each spring by making a series of welds.

Following application of the adhesive to the first string, the first string is preferably displaced onto a turning mechanism by which the first string is tipped into an upright position such that the surface of the first string to which adhesive has been applied is brought into contact with the surface of the second string. The second string will most commonly be a string which  
10 has immediately beforehand been processed in the same manner as the first string. The turning mechanism most preferably comprises a plate disposed parallel to the adhesive applicators. The plate preferably has a width corresponding approximately to the width of the first string and pivots about its major edge which is remote from the adhesive applicators. When the first string is displaced onto the plate, the plate can thus be pivoted  
15 to tip the first string away from the adhesive applicators and into contact with the second string. The turning mechanism is most preferably provided with means for retaining the string of springs in position during the turning operation. Such means conveniently comprises one or more electromagnets which are activated when the string of springs has been displaced onto the turning plate and are switched off once the first string is pressed into  
20 contact with the second string.

The various movements of the first string, ie into alignment with the adhesive applicators, transversely beneath the adhesive applicators, and onto the turning plate, are most conveniently brought about by suitable mechanical means, eg using electric, hydraulic or pneumatic power. Suitable sensors are preferably provided to monitor and control the  
25 various movements, in generally conventional fashion.

The adhesive which is applied to the first string may be one of those adhesives which are

conventionally used in the manufacture of innerspring assemblies. Hot melt adhesives are particularly suitable. In general, any conventional adhesive having the desired properties (eg strong adhesion, good flow properties, and lack of odour) may be used.

For many applications adhesive will be dispensed from the adhesive applicators with those applicators in fixed, stationary positions relative to the string of springs. In other cases, however, adhesive may be dispensed whilst controlled movement of the applicators relative to the string of springs is taking place. This may be necessary or desirable, for example to achieve a particular (eg elongated) distribution of adhesive on the surface of some or all of the pockets. Obviously, such an effect may be achieved either by moving the applicators relative to a stationary string of springs, or (as may be more convenient) displacing the string of springs relative to fixed applicators.

It may also be desirable for the separation of the adhesive applicators from the string of springs to be adjustable, eg to vary the size of the area to which adhesive is applied. Such an arrangement also allows spring pockets of different diameters to be accommodated.

As explained above, the present invention enables the manufacture of innerspring assemblies which are "zoned", ie which have portions of differing firmness. Thus, according to a further aspect of the invention, there is provided an innerspring assembly which comprises strings of pocketed coil springs, said strings being joined by adhesive applied to abutting surfaces of the pockets of adjacent strings, wherein the quantity and/or distribution of adhesive applied to the pockets of adjoining strings is non-uniform. Such an innerspring assembly may comprise at least one portion in which adjacent strings are connected by relatively high quantities of adhesive applied to the pockets of those strings, and at least one portion in which adjacent strings are connected by relatively low quantities of adhesive applied to the pockets of those strings.

It will be understood that, although reference is made above principally to innerspring assemblies for use in mattresses, the same methods and apparatus may be used in the

manufacture of innerspring assemblies for cushions and the like.

The invention will now be described in greater detail, by way of illustration only, with reference to the accompanying drawings, in which

Figure 1 is a schematic plan view of apparatus in accordance with the invention;

5

Figure 2 is a view on the line II-II in Figure 1;

Figure 3 is a fragmentary perspective schematic view illustrating stages in the carrying out of the invention;

Figure 4 is a schematic view of a string of pocketed springs for use in the manufacture of a

10 "3-zone" mattress;

Figure 5 is a view similar to Figure 4, but of a string of pocketed springs for use in the manufacture of a mattress having a "5-zone" construction;

Figure 6 is a side view of pocketed springs showing a mode of application of adhesive suitable for assembly of a mattress having a nested spring configuration; and

15 Figure 7 is a plan view of a nested innerspring assembly.

Referring first to Figures 1 and 2, apparatus for the manufacture of an innerspring assembly is generally designated 1. The apparatus 1 is fed with a continuous chain 2 of pocketed coil springs which may be manufactured by conventional techniques.

20 A string 6 of pocketed springs is cut to a suitable length by conventional cutting means (not shown) from the leading portion of the chain 2. The string 6 is transported longitudinally onto a bed 4 by a suitable conveyor means (also not shown). In the example illustrated, the



string 6 has a length of twenty pocketed springs, this length corresponding to the length of the finished innerspring assembly.

Once the leading string 6 has been deposited on the bed 4, the conveyor means halts temporarily. The string 6 is then driven laterally across the bed 4 by a transport plate 8 which in the illustrated embodiment is actuated by a pair of pneumatic rams 10. For increased precision it may be preferable for the transport plate 8 to be driven by a servo motor. A row of twenty adhesive guns 12 are disposed above the path of the string 6 and are actuated as the string 6 passes beneath them, so as to deposit a quantity of hot melt adhesive on the upwardly facing surface of each pocket in the string 6. This may be achieved by brief actuation of the adhesive guns 12 whilst the string 6 is in motion beneath the guns 12. Alternatively, movement of the string 6 beneath the guns 12 may be halted temporarily whilst the guns 12 are actuated. It will be appreciated that by appropriate control of the movement of the string 6 and actuation of the guns 12, a variety of different patterns of adhesive may be applied to the surface of the pockets making up the string 6. For instance, the adhesive may be applied as a single, generally circular spot 13 (as shown in Figure 3), or as a series of spots disposed longitudinally along the pocket (or otherwise, as described below), or a continuous line of adhesive may be applied along the pocket. Similarly, it is possible for all the guns 12 to be actuated so that adhesive is applied to all the pockets, or for only some of the guns 12 to be actuated.

After application of the adhesive, the string 6 is transported further, in the same direction, by the transport plate 8, onto a turning table 14. The turning table 14 rotates through  $90^\circ$ , thereby tipping the string 6 into an upright position and pressing the surface of the string 6 to which adhesive has been applied into contact with the corresponding surface of a previously processed string 6a which rests on a main bed 16. Electromagnets (not shown) fitted beneath the turning table 14 hold the string 6 in place during the tipping operation. While the string 6 is being turned, the pneumatic rams 10 withdraw the transport plate 8 to its starting position (as shown in Figures 1 and 2) and the next string is conveyed onto the bed 4. The next string is then processed in the same manner as the preceding string 6. In this

manner, the completed innerspring construction is built up from successive strings 6, 6a, 6b etc.

5 The degree of adhesion between adjacent pockets in successive strings in the assembled innerspring assembly determines the degree of firmness of that part of the innerspring assembly, and hence of that part of a mattress in which the innerspring assembly is used. It is thus possible to control the firmness of the mattress by appropriate application of adhesive to the respective pockets. Figure 4 shows a pattern of adhesive application appropriate for a so-called "3-zone" mattress. In such a construction, the head and foot parts of the mattress are relatively soft, while the central region of the mattress is relatively firm. To achieve such  
10 a result, adhesive is applied to a larger area 21 of the pockets in the central part b of each string, as compared with the area 22 of the adhesive applied to the pockets at the two end portions a,c of the string.

Figure 5 shows a somewhat more complex pattern of adhesive application, suitable for the formation of a "5-zone" mattress. In such a mattress, the central region m is again the firmest  
15 (adhesive being applied to the largest area 31), but in this case the extreme head and foot parts k,o are of intermediate firmness (adhesive area 32), being separated from the central region k by relatively soft regions l,n (smallest adhesive regions 33).

The patterns of adhesive application shown in Figures 4 and 5 are appropriate for innerspring assemblies in which the spring pockets are arranged with their centres in a square array, ie  
20 in which the pockets are arranged in regular longitudinal and transverse rows. Another arrangement which is sometimes used is a so-called nested arrangement, in which the spring pockets are arranged in an hexagonal array. Such an array is shown in Figure 7. Because, in the formation of such an array, it is not the central part of each spring pocket which is pressed against the pockets of the previous string, but rather surfaces of the pocket which are  
25 offset from the centre line, the adhesive application pattern shown in Figure 6 is more appropriate. This pattern consists of two circular areas of adhesive 41,42 applied to each pocket, the two areas 41,42 being spaced apart along, and offset from, the longitudinal axis

of each pocket. A pattern of this form may be created by applying adhesive first to the areas 41, with the adhesive guns 12 offset from the centre lines of the pockets, and then moving the adhesive guns 12 to a second position, offset in the other direction, and applying adhesive then to the second areas 42. The separation of the two areas 41,42 along the centre lines of the pockets is brought about by the movement of the string towards the turning table between the two applications of adhesive.

Clearly, in order to enable the two areas of adhesive to be applied on opposite sides of the centre line of each pocket it is necessary for there to be means for displacing the adhesive guns 12 relative to the string. There may therefore be provided means for moving the guns 12 as a unit, or for displacing the string a short distance along its longitudinal axis relative to fixed guns. In a further alternative, a pattern such as that shown in Figure 6 could be produced using two rows of adhesive guns, both arranged on axes parallel to the longitudinal axis of the string but offset from one another such that the guns of one row deposit adhesive to one side of the pocket centre lines (say the first areas 41) and the other row of guns deposit adhesive to the other side (ie to the second areas 42).

It will also be appreciated that patterns of adhesive may also be produced by the method of the invention in which adhesive is applied to two (or more) areas on the centre line of some or each of the pockets. Such areas of adhesive may be discrete, or they may overlap or merge to form single, larger areas.

Claims

1. A method for the manufacture of an innerspring assembly, which method comprises the steps of

5 a) positioning a first string of pocketed coil springs in juxtaposition with a plurality of adhesive applicators disposed in mutually fixed relation on an axis parallel to a longitudinal axis of said first string,

b) applying adhesive from said adhesive applicators to said first string of pocketed coil springs, and

10 c) bringing said first string into adhesive contact with a second string of pocketed coil springs.

2. A method as claimed in Claim 1, wherein adhesive is applied from said plurality of adhesive applicators simultaneously or substantially simultaneously.

3. A method as claimed in Claim 1 or Claim 2, wherein the first string of pocketed coil springs is positioned by being fed longitudinally and then displaced transversely into  
15 juxtaposition with the adhesive applicators.

4. A method as claimed in any preceding claim, wherein following application of the adhesive to the first string, the first string is tipped into an upright position such that the surface of the first string to which adhesive has been applied is brought into contact with the surface of the second string.

- 20 5. A method as claimed in any preceding claim, wherein the second string has immediately beforehand been processed in the same manner as the first string.

6. A method as claimed in any preceding claim, wherein the movements of the first string are brought about by suitable mechanical means, using electric, hydraulic or pneumatic power.

7. A method as claimed in any preceding claim, wherein the adhesive which is applied to the first string is a hot melt adhesive.
8. A method as claimed in any preceding claim, wherein adhesive is dispensed from the adhesive applicators with those applicators in fixed, stationary positions relative to the first string.
9. A method as claimed in any one of Claims 1 to 7, wherein adhesive is dispensed from the adhesive applicators whilst movement of the applicators relative to the first string is taking place.
10. A method as claimed in Claim 9, wherein the first string is stationary and the applicators are moved.
11. A method as claimed in Claim 9, wherein the applicators are fixed and the first string is displaced.
12. Apparatus for use in the manufacture of an innerspring assembly, which apparatus comprises a plurality of adhesive applicators, means for positioning a first string of pocketed coil springs in juxtaposition with said plurality of adhesive applicators, and means for bringing said first string into contact with a second string of pocketed coil springs, wherein said plurality of adhesive applicators are disposed in mutually fixed relation on an axis parallel to a longitudinal axis of said first string.
13. Apparatus as claimed in Claim 12, wherein the adhesive applicators are arranged in a line.
14. Apparatus as claimed in Claim 12 or Claim 13, wherein each applicator has a downwardly directed outlet for adhesive.

15. Apparatus as claimed in any one of Claims 12 to 14, wherein each applicator is provided with more than one outlet for adhesive.
16. Apparatus as claimed in any one of Claims 12 to 15, comprising a turning mechanism by which the first string is tipped into an upright position such that the surface of the first string to which adhesive has been applied is brought into contact with the surface of the second string.
17. Apparatus as claimed in Claim 16, wherein the turning mechanism comprises a plate disposed parallel to the adhesive applicators.
18. Apparatus as claimed in Claim 17, wherein the plate has a width corresponding approximately to the width of the first string and pivots about its major edge which is remote from the adhesive applicators.
19. Apparatus as claimed in any one of Claims 12 to 18, further comprising mechanical means for bringing about movement of the first string.
20. Apparatus as claimed in Claim 19, wherein the mechanical means operate under electric, hydraulic or pneumatic power.
21. Apparatus as claimed in any one of Claims 12 to 20, further comprising sensors to monitor and control the movements of the first string.
22. An innerspring assembly manufactured by the method of any one of Claims 1 to 11.
23. An innerspring assembly as claimed in Claim 22, which is for use in a mattress.
24. An innerspring assembly which comprises strings of pocketed coil springs, said

strings being joined by adhesive applied to abutting surfaces of the pockets of adjacent strings, wherein the quantity and/or distribution of adhesive applied to the pockets of adjoining strings is non-uniform.

- 5 25. An innerspring assembly as claimed in Claim 24, which comprises at least one portion in which adjacent strings are connected by relatively high quantities of adhesive applied to the pockets of those strings and at least one portion in which adjacent strings are connected by relatively low quantities of adhesive applied to the pockets of those strings.

1/3

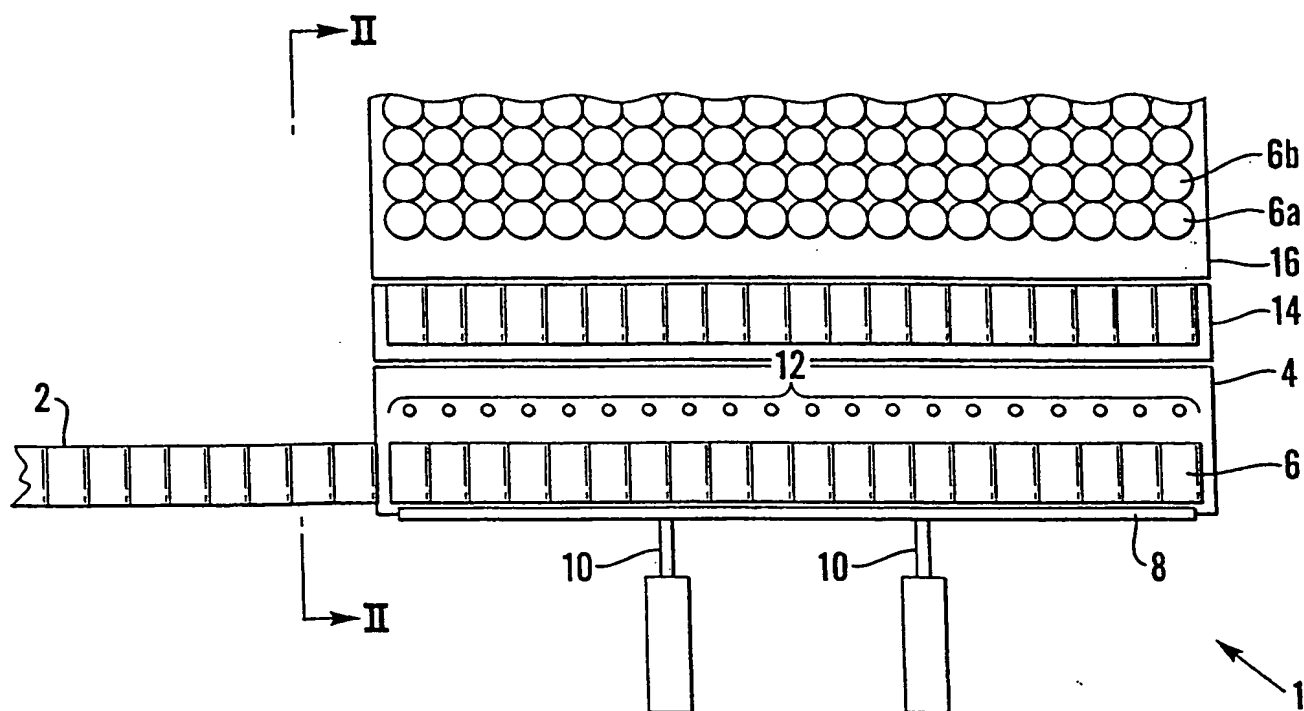


Fig. 1


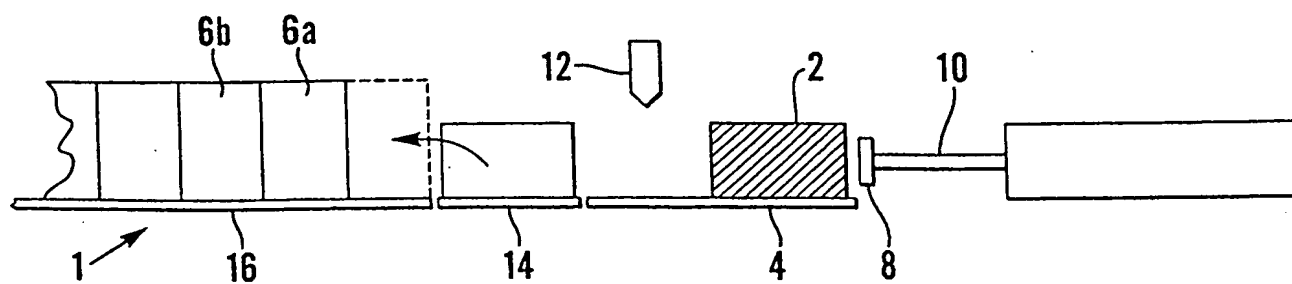


Fig. 2

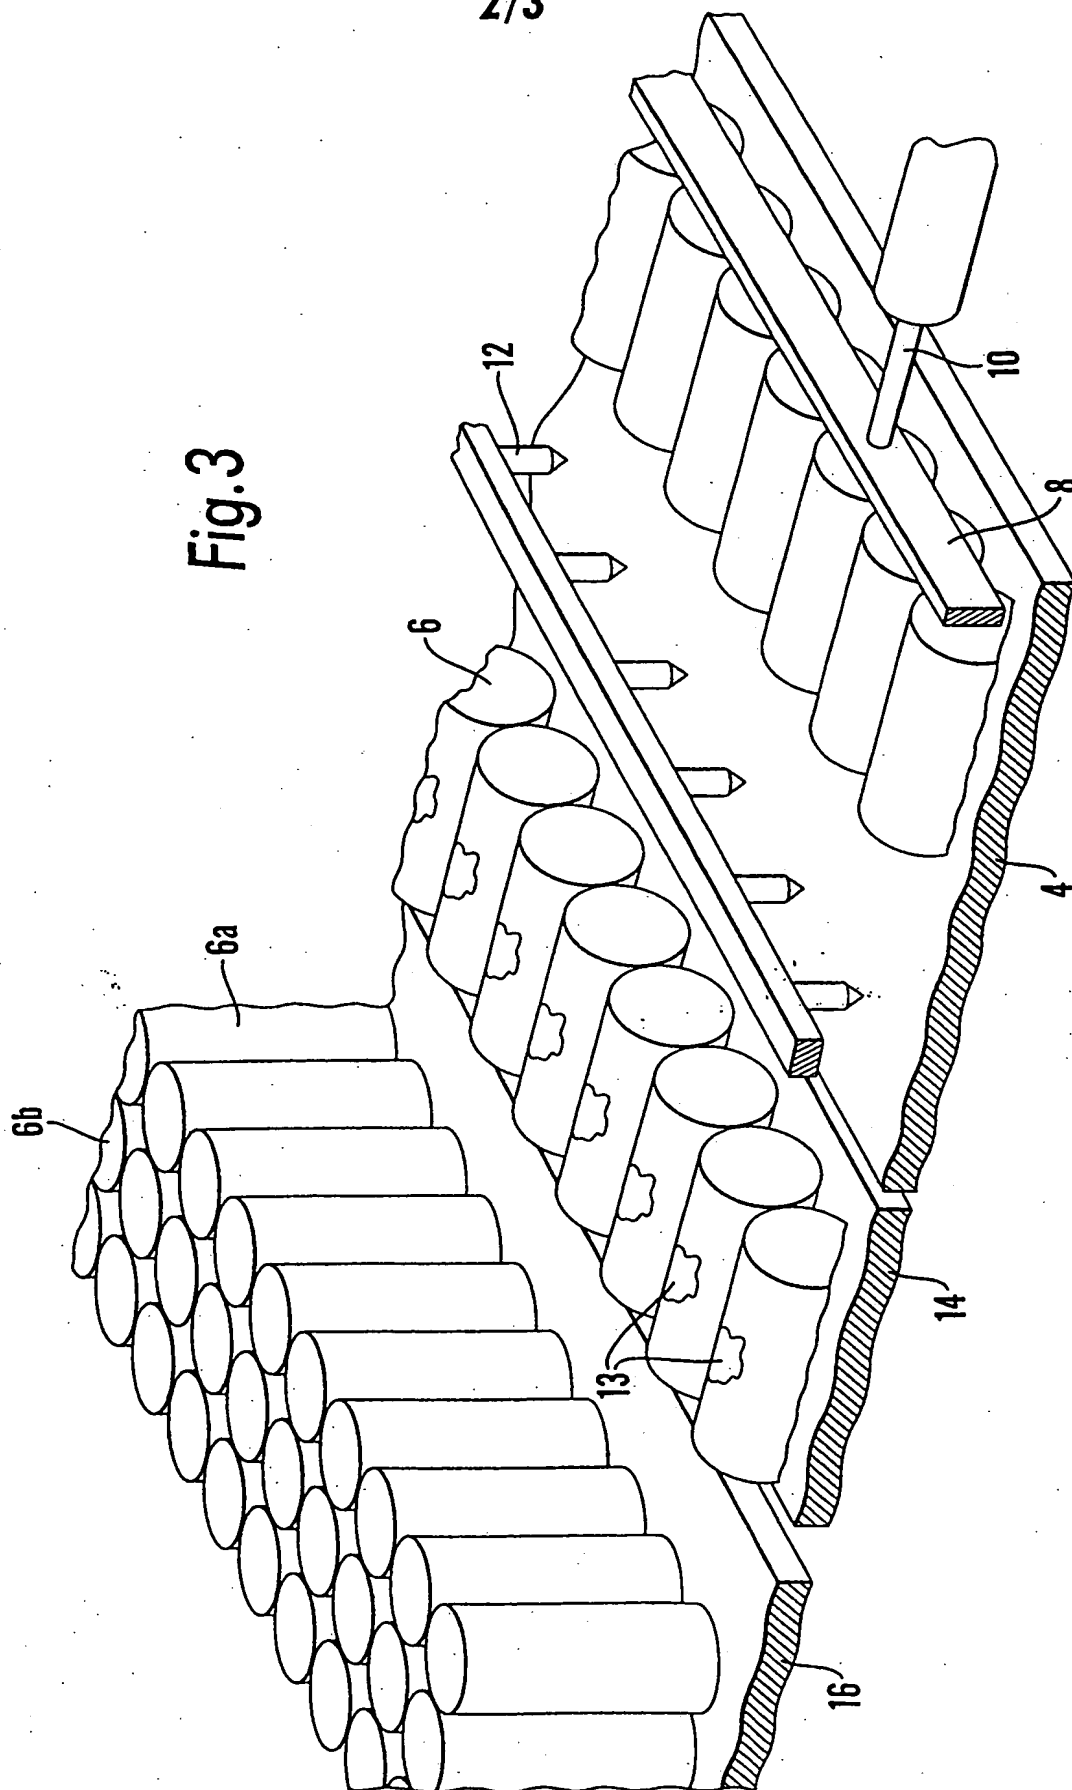

2/3

Fig. 3



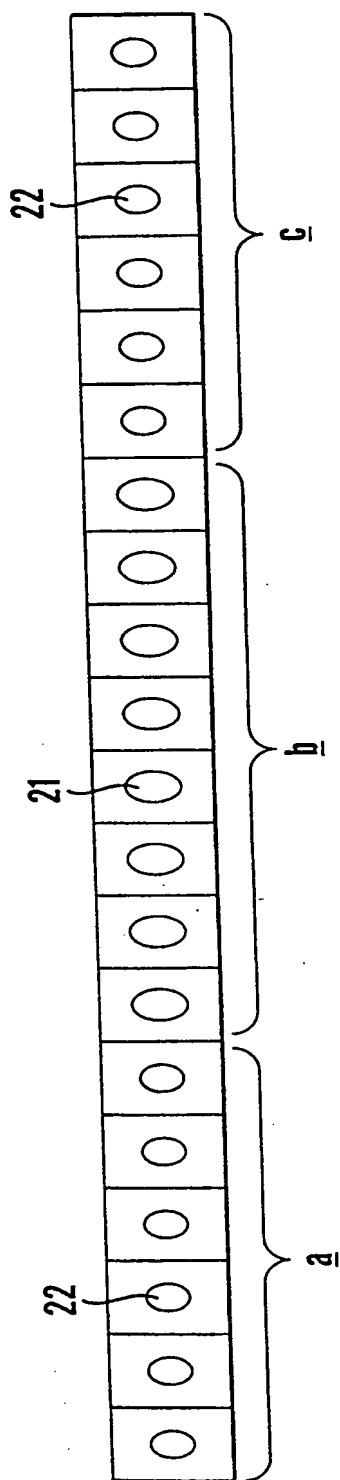


Fig. 4

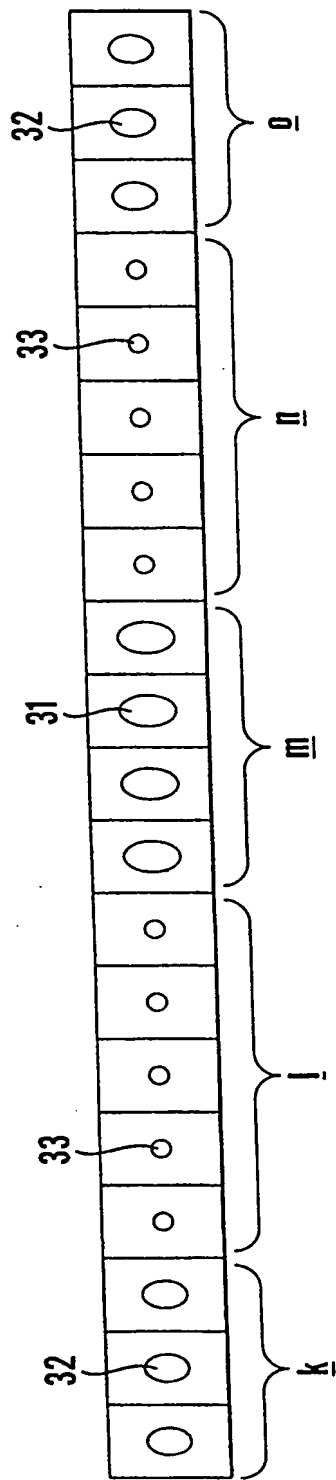


Fig. 5

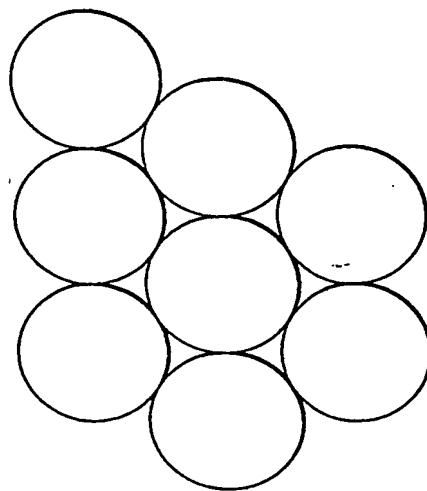


Fig. 7

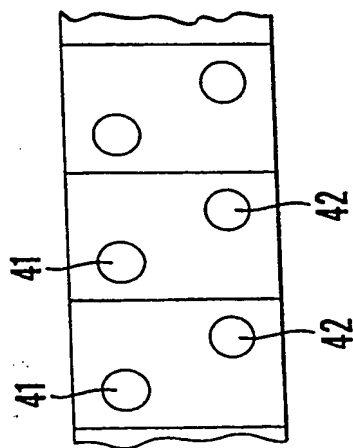


Fig. 6

## INTERNATIONAL SEARCH REPORT

Inter national Application No

PCT/GB 00/00917

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 B68G9/00 A47C27/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B68G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 421 495 A (B LINEA) 10 April 1991 (1991-04-10) cited in the application column 3, line 38 -column 4, line 6 column 8, line 16 - line 38	1,3-6,9, 11,12, 14,16-24
A	EP 0 624 545 A (TOLEDO FJEDERINDLAEG AS) 17 November 1994 (1994-11-17)  figures 1,4,5	1,3-6,9, 11,12, 16-20, 22-24
A	WO 96 07345 A (SIMMONS CO) 14 March 1996 (1996-03-14) claim 6	1,7

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

2 June 2000

Date of mailing of the international search report

14/06/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3018

Authorized officer

Martin, A

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/00917

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0421495 A	10-04-1991	BE 1003537 A	14-04-1992
		CA 2026817 A,C	06-04-1991
		DE 69008098 D	19-05-1994
		DE 69008098 T	13-10-1994
		DK 421495 T	08-08-1994
		ES 2053073 T	16-07-1994
		JP 2963754 B	18-10-1999
		JP 3121730 A	23-05-1991
		US 5126004 A	30-06-1992
		US 5637178 A	10-06-1997
EP 0624545 A	17-11-1994	AT 158263 T	15-10-1997
		DE 69314010 D	23-10-1997
		DE 69314010 T	16-04-1998
		DK 624545 T	09-03-1998
WO 9607345 A	14-03-1996	US 5621935 A	22-04-1997
		AU 1510695 A	27-03-1996
		EP 0779789 A	25-06-1997

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**